


FCF Series Cooling Systems Specifications



Each FCF unit comes standard with a 4 or 5 inch ducting collar, high velocity 360 degree rotatable blower, remote mount electrical box, digital control with bezel, remote control, air filter, and reverse cycle heat.

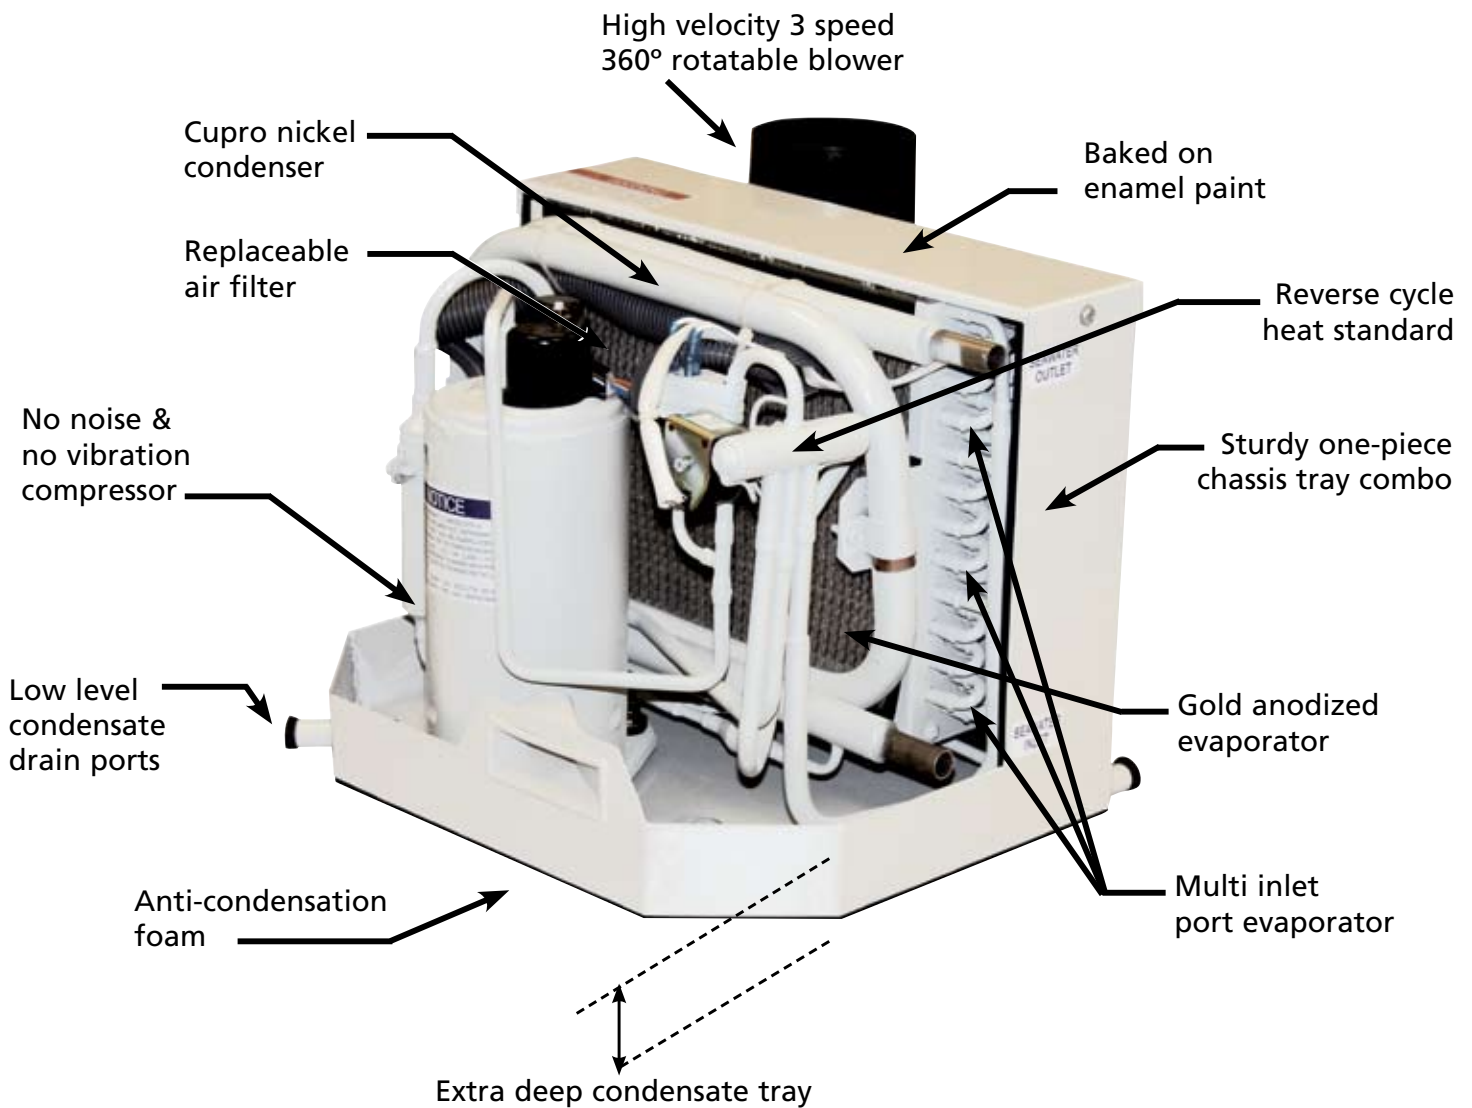

FCF 5000
5000 BTU



FCF 9000
9000 BTU



FCF 12000
12000 BTU



FCF 16000
16000 BTU

Specifications

	Part Number	Capacity	Min. Suggested Supply Air	Min. Suggested Return Air	Voltage	Frequency	Average Load Amps	Net Weight	Blower Output	Ducting Collar Diam.	Condenser Conn. Diam.	Dimensions: Length x Depth x Height
FCF 5,000	FCF0005000/ FCF0005023	5,000 Btu (1.5 kW)	16 in ² (103.2 cm ²)	49 in ² (316 cm ²)	115V/ 230V	50/60 Hz	4.4 A/ 2.2 A	50 lbs. (23 kg)	282 cfm (479 m ³ /h)	4 in. (102 mm)	5/8 in. (15 mm)	11 13/32 x 14 7/8 x 11 19/32 in. (290 x 378 x 295 mm)
FCF 9,000	FCF0009000/ FCF0009023	9,000 Btu (2.6 kW)	16 in ² (103.2 cm ²)	64 in ² (413 cm ²)	115V/ 230V	50/60 Hz	6.4 A/ 3.2 A	57 lbs. (26 kg)	344 cfm (584 m ³ /h)	4 in. (102 mm)	5/8 in. (15 mm)	14 7/8 x 15 1/2 x 11 19/32 in. (378 x 394 x 295 mm)
FCF 12,000	FCF0012000/ FCF0012023	12,000 Btu (3.5 kW)	20 in ² (129 cm ²)	100 in ² (645 cm ²)	115V/ 230V	50/60 Hz	8.5 A/ 4.2 A	68 lbs. (31 kg)	410 cfm (696 m ³ /h)	5 in. (127 mm)	5/8 in. (15 mm)	14 7/8 x 16 7/64 x 12 7/8 (378 x 409 x 327 mm)
FCF 16,000	FCF0016000/ FCF0016023	16,000 Btu (4.7 kW)	24 in ² (154.8 cm ²)	121 in ² (780.6 cm ²)	115V/ 230V	50/60 Hz	11 A/ 5.5 A	75.75 lbs. (33 kg)	505 cfm (858 m ³ /h)	5 in. (127 mm)	5/8 in. (15 mm)	17 11/16 x 17 5/16 x 12 11/16 in. (450 mm x 439 x 322 mm)



*Electronic controller
with interchangeable bezels*

Webasto Partner:



Webasto Product North America, Inc.
15083 North Rd.
Fenton, MI 48430
Phone: (800) 215-7010
www.webasto-marine.com